

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 October 2004 (21.10.2004)


PCT

(10) International Publication Number
WO 2004/091167 A1

- (51) International Patent Classification⁷: **H04L 29/06**
- (21) International Application Number:
PCT/JP2004/003586
- (22) International Filing Date: 17 March 2004 (17.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2003-098596 1 April 2003 (01.04.2003) JP
- (71) Applicant (for all designated States except US): MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 5718501 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): YOSHIDA, Junji.
HAMAI, Shinji.
- (74) Agent: NII, Hiromori; c/o NII Patent Firm, 3rd Floor, Shin-Osaka Suehiro Center Bldg., 11-26, Nishinakajima 3-chome, Yodogawa-ku, Osaka-shi, Osaka 5320011 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: COMMUNICATION APPARATUS AND AUTHENTICATION APPARATUS

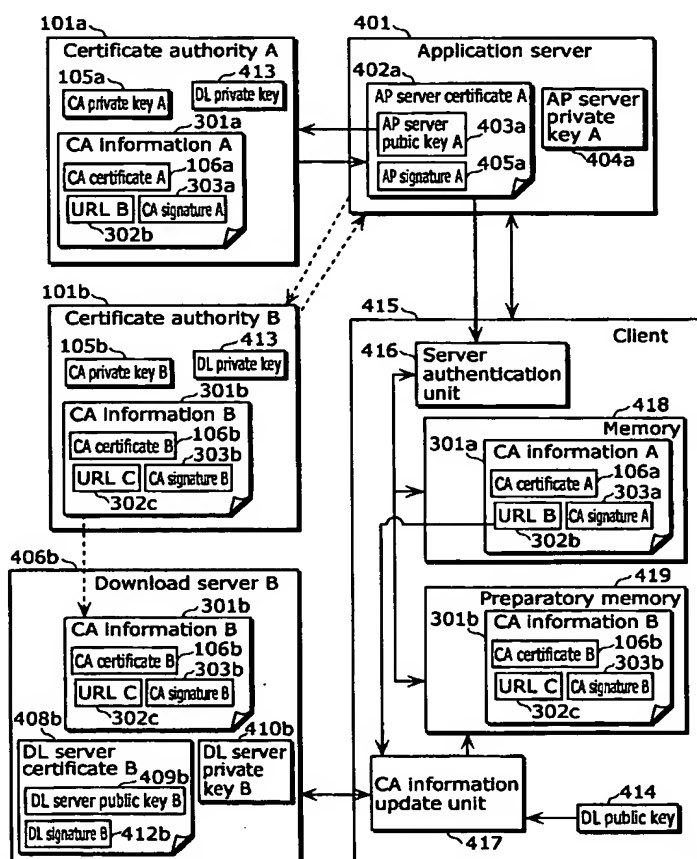

(57) Abstract: A communication apparatus includes: a memory (418) that holds CA information A(301a) including (ú@) a CA certificate A(106a) indicating that an AP server certificate A(402a) that indicates the validity of an application server (401) is valid and (úA) a URL B(302b) indicating the URL of a download server B(406b) where CA information B(301b) including the next valid CA certificate B(106b) is stored; a server authentication unit (416) that verifies the AP server certificate A(402a) using the CA certificate A(106a); and a CA information update unit (417) that obtains the CA information B(301b) from the download server B(406b) indicated by the URL B(302b), wherein when the CA certificate A(106a) becomes revoked, the server authentication unit (416) thereafter authenticates the application server (401) using the CA certificate B(106b) included in the CA information B(301b) obtained by the CA information update unit (417).



GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*